

PVC PIPE



The TDR™ PVC Sewer Series represents our Sewer PVC pipe and fittings line, innovatively engineered with cutting-edge technology. Boasting remarkable strength, each 14' and 20' section features a gasketed bell end, making it an ideal solution for gravity sewers, surface water drainage, and industrial waste disposal applications.

SCOPE

This specification designates the requirements for 4" - through 15" - inch TDR™ PVC Sewer Series pipe and fittings suitable for non-pressure drainage of sewage and surface water.

PIPE

TDR™ PVC Sewer Series is a product with exceptional strength and advance technology.

- SDR 26 and 35 - Gravity Sewer
- Gasketed Bell End 14' and 20' sections
- Rieber Gasket technology.
- Color Green

APPLICATIONS

- Gravity Sewer
- Non-Pressure drainage of surface water
- Industrial waste disposal*

STANDARDS


Pipe and Fittings: ASTM D 3034 Type PSM Poly(Vinyl Chloride) (PVC) Sewer Pipe and Fittings

PVC compound: 12454 or 12364 per ASTM D 1784

Gasket: ASTM F477

Installation: ASTM D 2321

Nominal ID	Min. Outside Diameter	SDR 26	SDR 35
		Min. Wall Thickness	Min. Wall Thickness
(in)	(in)	(in)	(in)
4"	4.215"	0.162"	0.120"
6"	6.275"	0.241"	0.180"
8"	8.400"	0.323"	0.240"
10"	10.500"	0.404"	0.300"
12"	12.500"	0.481"	0.360"
15"	15.300"	0.588"	0.437"

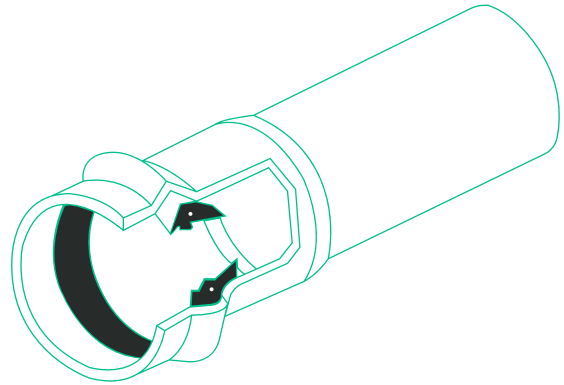

Note: Values provided for references purposes only. Contact a technical representative for additional information.

AApr. 2024